


Max load:	n/a lb	n/a kg
Volume:	n/a y ³	n/a m ³
Area tip to tip:	5.38 ft ²	.50 m ²
Rotator lifting capacity:	- lb	- kg
Torque at relief pressure:	- lb-in - psi	- Nm - bars
Weight:	1200 lb	544 kg

Rotator	Maximum pressure: - psi - bars	Recommended flow: - gpm - l/min
Rotator recommended flow will produce a speed of 0 rpm		

Cylinder	Diameter	Recommended pressure	Pressure range	Flow range	Lock valves
Standard	3 1/2 " (89 mm)	4050 psi (279 bars)	3600-4500 psi (248-310 bars)	17-26 gpm (64-98 l/min.)	Yes
Option	4 " (102 mm)	3050 psi (210 bars)	2500-3600 psi (172-248 bars)	23-35 gpm (87-132 l/min.)	Yes

Grapple cylinder maximum flow will theoretically produce a complete grapple open/close cycle in 4 seconds.

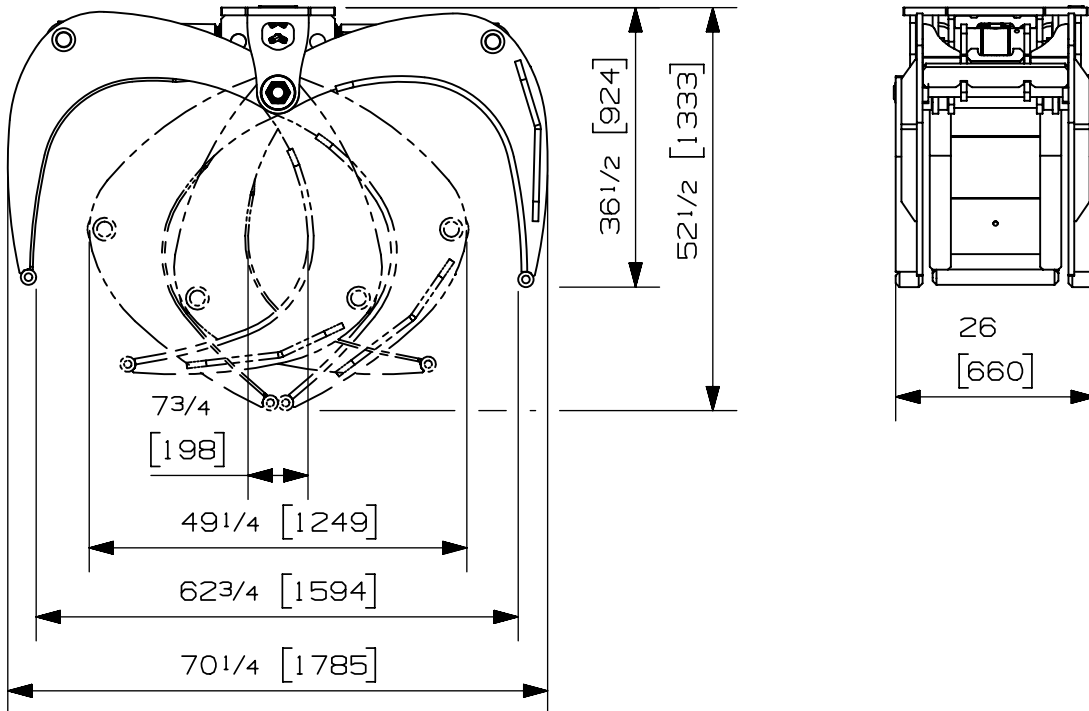

Options:


web site: www.rotobec.com

email: rotobec@rotobec.com

Rotobec Inc.: Head office serving OEM's and Eastern Canada Ph: (418) 383-3002 Fax: (418) 383-5334
Rotobec West: Branch serving Western Canada and Western USA Ph: (250) 765-1161 Fax: (250) 765-0035
Rotobec USA: Branch serving Eastern and Central USA Ph: (603) 444-2103 Fax: (603) 444-0327

We reserve the right to change specifications and to improve our products without notice or obligation.

C-07008-2112
03/04/13 D.L.

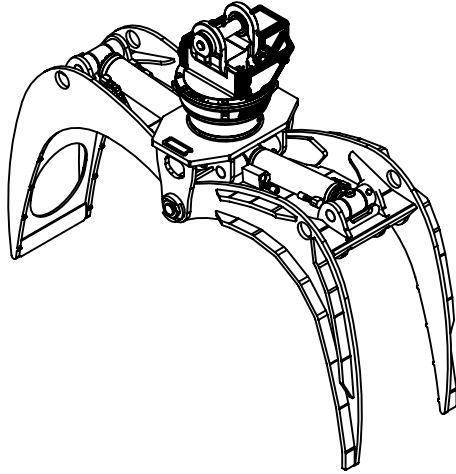


Max load:	- lb	- kg
Volume:	2.08 y ³	1.59 m ³
Area tip to tip:	7.00 ft ²	.65 m ²
Rotator lifting capacity:	50000 lb	22680 kg
Torque at relief pressure:	18630 lb-in	2105 Nm
	1450 psi	100 bars
Weight:	1740 lb	789 kg

Rotator	Maximum pressure: 5000 psi 345 bars	Recommended flow: 9 gpm 34 l/min
Rotator recommended flow will produce a maximum speed of 25 rpm		

Cylinder	Diameter	Recommended pressure	Pressure range	Flow range	Lock valves
Standard	3 1/2 " (89 mm)	4050 psi (279 bars)	3600 - 4500 psi (248-310 bars)	17 - 26 gpm (64-98 l/min.)	Yes

Grapple cylinder maximum flow will theoretically produce a complete grapple open/close cycle in 4 seconds.

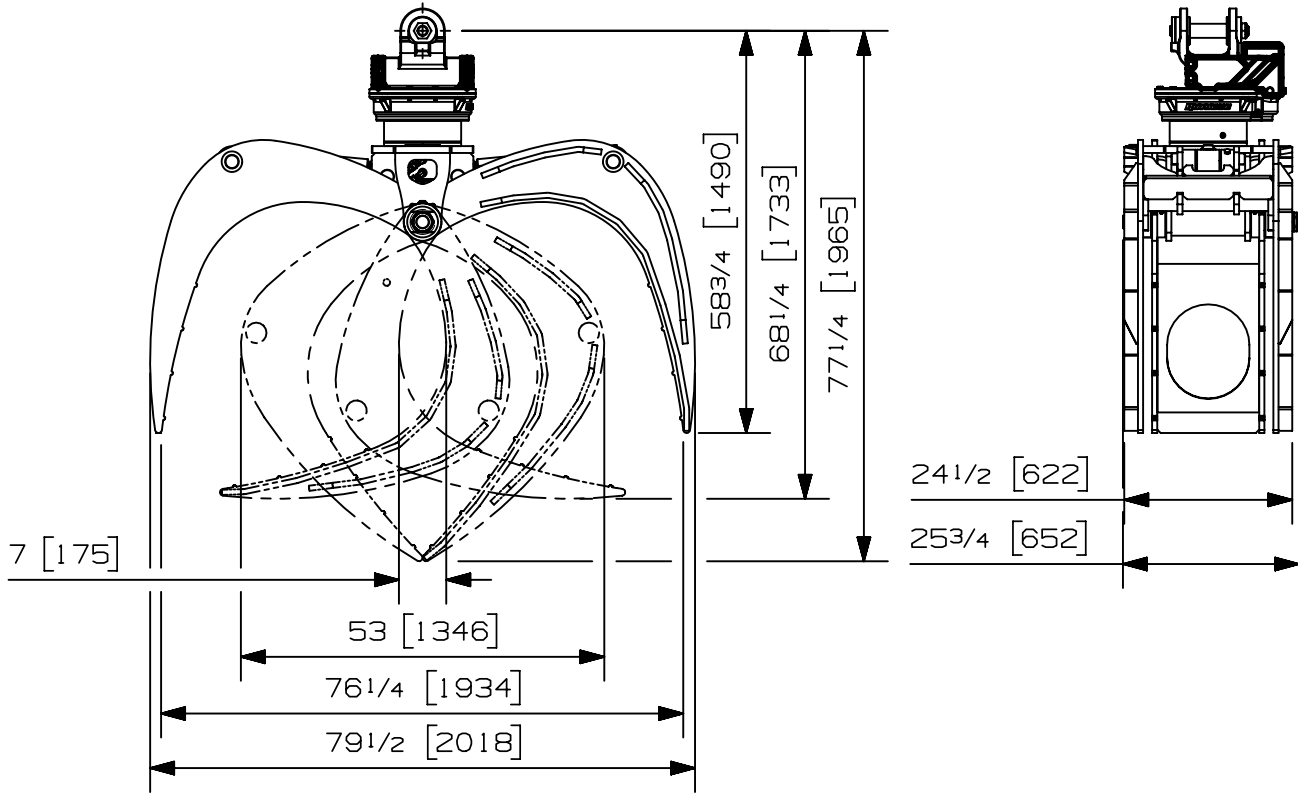

Options:

-
-
-
-

web site: www.rotobec.com

email: rotobec@rotobec.com

Rotobec Inc.: Head office serving OEM's and Eastern Canada Ph: (418) 383-3002 Fax: (418) 383-5334
Rotobec West: Branch serving Western Canada and Western USA Ph: (250) 765-1161 Fax: (250) 765-0035
Rotobec USA: Branch serving Eastern and Central USA Ph: (603) 444-2103 Fax: (603) 444-0327

We reserve the right to change specifications and to improve our products without notice or obligation.

07009-9132
10/11/2020 **E.B.L.**