



Oceanix Water Tech™
POOL EQUIPMENT

RAPID FLOW SAND FILTER

**NEW AND IMPROVED
LATERALS SYSTEM
FOR INCREASED
EFFICIENCY**




- Specially designed “T-Lateral” system to maximise water flow for efficient filtration and backwashing
- Virtually maintenance free and easy to use
- Constructed from strong corrosion and UV resistant bobbin wound reinforced fibreglass, ensuring long and reliable working life
- Computer designed providing optimal tank strength and filtration performance
- Large diameter tank for maximum filtration area
- Up to 370 kpa operating pressure
- Built-in waste port sight glass for high visibility of water during backwashing
- Stainless steel liquid filled pressure gauge makes it easy to see when backwashing is required
- Suitable for sand, Zelbrite and glass media



Call 02 8924 1526
info@phoenixoceanix.com.au

RAPID FLOW SAND FILTER

Ideal for in-ground and above ground pools, the RAPID FLOW SAND FILTER is suitable for salt, mineral salt and fresh water pools. Models applicable for pools up to 95,000 litres.

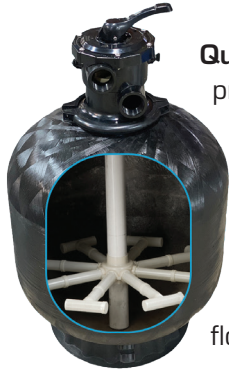

Quality 6-way multiport valve, integrated sight glass and liquid filled pressure gauge for optimum filter control.

Robust A.B.S barrel unions for easy installation and maintenance.


Cylindrical shape provides the most efficient filtration operation and up to 370 kPa operating pressure.

Long life UV stabilised, filament wound fiberglass tank.

Large media area means better filtration with high efficiency.

Specially designed T-Laterals and hub assembly to optimise water flow for efficient filtration and backwashing.

PERFORMANCE DATA & MEDIA REQUIRED	MODEL	SIZE (INCHES)	SAND REQUIRED	ZELBRITE REQUIRED (kg/bags)	GLASS REQUIRED		MAXIMUM FLOW RATE (lpm)	MINIMUM BACKWASH FLOW RATE (lpm)	6 HOUR TURNOVER (litres)	FILTRATION AREA (M ²)	MAX. WATER TEMP (°C)/ OPERATING PRESSURE (kPa)
					FINE/MEDIUM (kg/bags)	MEDIUM/COARSE (kg/bags)					
	OWT2140	21"	85/5	64/5	45/3	30/2	185	123	66,600	0.22	40/370
	OWT2540	25"	155/8	109/8	75/5	30/2	260	173	93,600	0.32	40/370
	OWT2550	25"	155/8	109/8	75/5	30/2	285	173	102,600	0.32	40/370
	OWT2850	28"	210/11	161/11	75/5	45/3	336	224	120,960	0.38	40/370

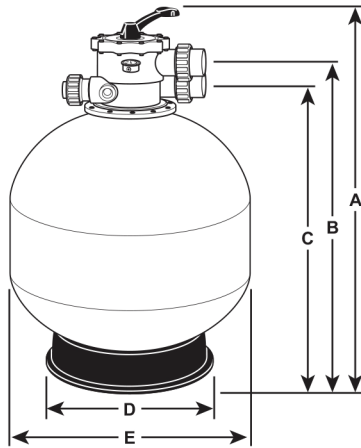

MODEL NUMBER ID		
OWT	28	50
OWT = Oceanix Water Tech Fiberglass Tank	28 = 28 inch tank diameter	50 = 50mm multiport valve

OPERATING LIMITS	
Maximum water temperature	40°C
Maximum operating pressure	370kpa

WARRANTY	
COMPONENT	COVERAGE
Tank	10 years
Multiport Valve	3 Years

MODEL	A	B	C	D	E	INLET PVC	OUTLET PVC	WASTE PVC
OWT2140	867	731	671	497	524		40	
OWT2540	967	831	771	497	635		40	
OWT2550	1017	863	783	497	635		50	
OWT2850	1080	926	846	497	700		50	

Please refer to the Media Filter datasheet for larger filters and pool size requirements. If used in a commercial application warranty may be void. Warranty may vary in international markets. Contact Oceanix Water Tech for further information.

02 8924 1526
 info@phoenixoceanica.com.au
 Unit 8 & 9, 89 Darley Street,
 Mona Vale, NSW 2103
 www.phoenixoceanica.com.au

Our family-owned and run business regards relationships at the forefront of everything we do. With over 40 years of industry experience in our team, our mission is simple. To provide the absolute highest standard of pool products and services Australia has to offer.



Proudly Australian Owned