


Profile Height	18mm
Material	Polypropylene(PP)
Edge Material	Polypropylene(PP)
Properties	Under-Tile Wire/Tube Routing, Water flows under keeping surface dry.
Sizes	40cm x 40cm (Main Tile), 6cm x 40cm (Beveled Edge), 6cm x 6cm (Corner Edge)
Temperature Resists	-40°C to 70°C
Max Load	6-8MT
Color	Black, Grey, Blue, Yellow, Red, Green, White

The Carwash Interlocking tiles material bears capacity requirements are relatively high in the automobile service industry, especially considering drainage and sediment in the washing process, Increasing the aperture, thickening design. Whether it is used for the car wash shop drainage slip, or for the use of moisture in the plant warehouse, our PP interlocking floor tiles both are practical.

Understructure of each floor tile has more supporting points, which is perpendicular to the ground, to ensure drainage, also ensure that the product can withstand heavy pressure. Each square meter can bear more than 10 tons flat ground.

Drainage underside

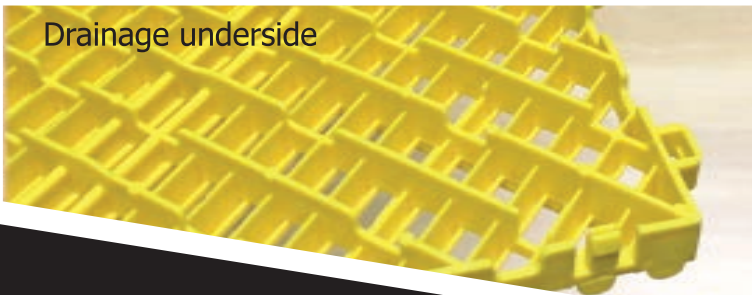

Interlocking Edges



CAR WASH INTERLOCKING TILES