

# RP & EC SERIES

## SALT WATER CHLORINATORS

*"Simply reliable"*




## CHLORINE PRODUCTION

MODEL	PER HOUR			OVER 8 HOURS		
	CHLORINE OUTPUT	CAL.HYPO. EQUIVALENT (65%)	SOD.HYPO. EQUIVALENT (12.5%)	CHLORINE OUTPUT	CAL.HYPO. EQUIVALENT (65%)	SOD.HYPO. EQUIVALENT (12.5%)
EC2000 RP2000	20g	30g	120ml	160g	184g	1.33Lt
EC3000 RP3000	30g	46g	200ml	240g	304g	2.00Lt
EC4000 RP4000	40g	61g	280ml	320g	432g	2.66Lt

EC is a standard manual cleaning model  
RP is a self cleaning model

## CHLORINATOR SIZING

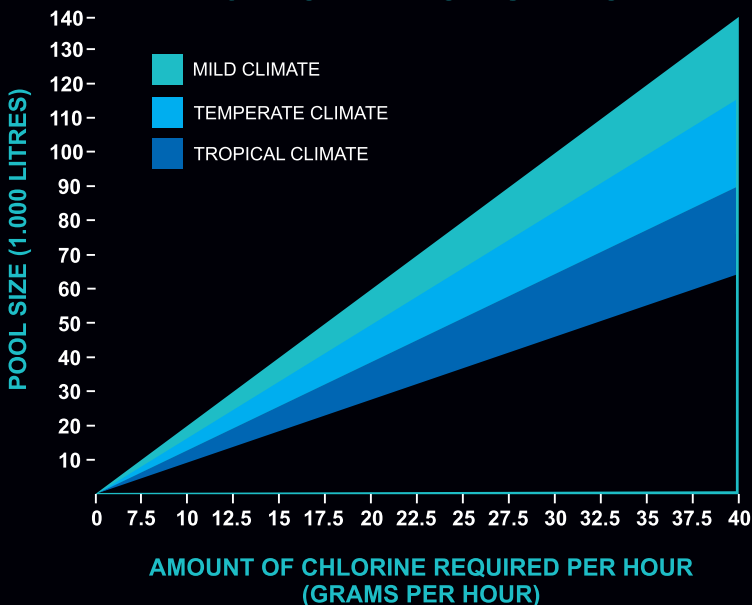

## FEATURES

- As it says "SIMPLY RELIABLE"
- Low salt operation: 3000-3500ppm (0.3%-0.35%)
- Hard / Soft switch for high calcium areas
- Over temp. protection
- Isolation transformer design, approved to AS3108
- Reliable quality automatic timer
- Premium grade titanium cell
- Over current protection
- Silicon controlled rectification
- Very high chlorine production
- Acrylic weather shield
- High Impact ABS plastic cell housing

NOW WITH IMPROVED HEAT SINKING

### To calculate the chlorine output required:

1. Determine your pool size (litres)
2. Move along the horizontal line until you reach your climate zone
3. Go down to determine the amount of chlorine you require (g/hr)
4. Always allow an extra 10-20%
5. In commercial installations allow at least 100% extra

**5** YEAR PRO - RATA WARRANTY ON CELL

**2** YEAR FULL WARRANTY ON POWER PACK

YOUR LOCAL AGENT

6/478 SCOTTSDALE DRIVE  
 VARSITY LAKES QLD 4227 AUSTRALIA  
 Ph: +61 7 5593 5494 Fax: +61 7 5593 6072  
 email: sales@crystalclearaus.com  
 www.crystalclearchlorinators.com.au