



HYDRAULIC CUTTING ATTACHMENTS

AQ-3XL Performance Data, Dimensions, and Weights



Recommended Excavator/Carrier Size Class:
15 - 28 tons

Hydraulic Power:
120HP (90kW)

See Back for Product Specifications.

www.antraquip.net




+1 301.665.1165



info@antraquip.net



758 BOWMAN AVENUE, HAGERSTOWN, MD 21740, USA

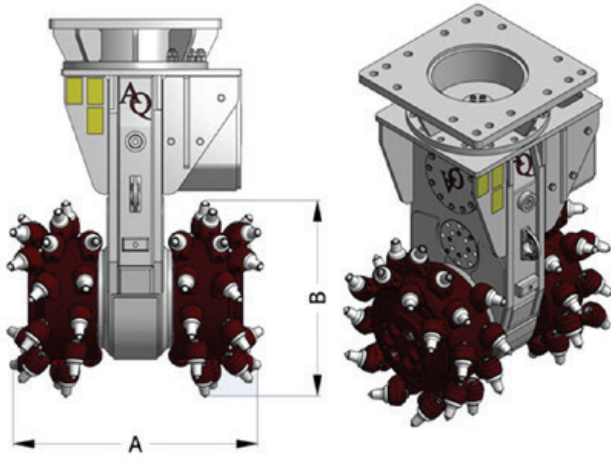

Quantity of cutter bits for standard drums: 48

The AQ-3XL hydraulic cutter is the perfect match for 15-28 ton carriers which are so commonly found on most jobsites around the world. This machine's power and compact design makes it excellent for narrow trenches and other heavy duty applications.

TRANSVERSE SPECIFICATIONS	STANDARD	METRIC
Cutting Head Diameter (B)	23 in	585 mm
Cutting Head Width (A)	32 in	815 mm
Displacement 1	80 RPM @ 40 GPM	80 RPM @ 151 L/MIN
Displacement 2	85 RPM @ 50 GPM	85 RPM @ 189 L/MIN
Oil Flow Range	34 - 65 GPM	125 - 245 L/MIN
Max Pressure	5,800 PSI	400 bar
Max Torque Output	11,200 ft lbs	15.185 Nm
Max Cutting Force	11,683 lbs	51.990 N
Weight	2,290 lbs	1.040 Kg
Maximum Input Power	120 HP	90 kW
Carrier Weight (Recommended)	15 - 28 tons	15 - 28 tons
Engine Power of Carrier (Recommended)	90 - 160 HP	65 - 120 kW

Please Note Hydraulic Power Rating Should Not Be Exceeded.

The AQ transverse cutting attachments are designed for rock and concrete cutting and can be mounted on excavators ranging from 1 - 180 ton.

Additional information on other AQ models are available at www.antraquip.net



Please call your Local Representative, or our Hagerstown, USA Headquarter Office at +1 301.665.1165