



# HYDRAULIC CUTTING ATTACHMENTS

AQ-5 Performance Data, Dimensions, and Weights



Recommended Excavator/Carrier Size Class:  
50 - 80 tons

Hydraulic Power:  
270HP (200kW)

See Back for Product Specifications.

[www.antraquip.net](http://www.antraquip.net)




+1 301.665.1165



[info@antraquip.net](mailto:info@antraquip.net)



758 BOWMAN AVENUE, HAGERSTOWN, MD 21740, USA

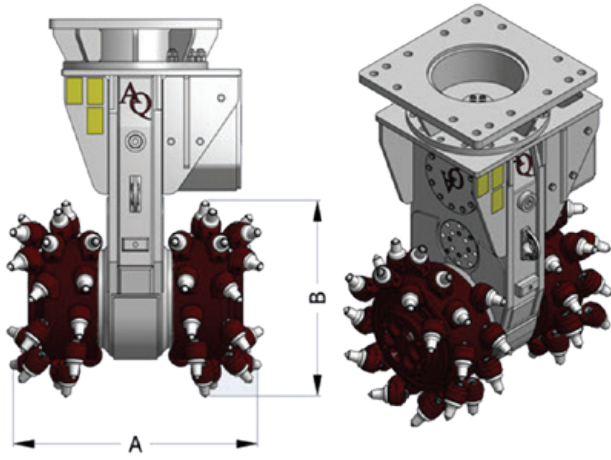

Quantity of cutter bits for standard drums: 64

Entering the category of large excavators, the AQ-5 is an excellent option for carriers in the 50-80 ton weight class. The combination of power and robust design of the transmission and cutting drums gives the AQ-5 the capability of cutting many types of hard rock with excellent efficiency.

TRANSVERSE SPECIFICATIONS	STANDARD	METRIC
Cutting Head Diameter (B)	33 in	840 mm
Cutting Head Width (A)	53 in	1.345 mm
Displacement 1	65 RPM @ 96 GPM	65 RPM @ 363 L/MIN
Displacement 2	60 RPM @ 135 GPM	60 RPM @ 510 L/MIN
Oil Flow Range	95 - 160 GPM	360 - 610 L/MIN
Max Pressure	5,800 PSI	400 bar
Max Torque Output	39,310 ft lbs	53.300 Nm
Max Cutting Force	28,686 lbs	127.655 N
Weight	7,832 lbs	3.560 Kg
Maximum Input Power	270 HP	200 kW
Carrier Weight (Recommended)	50 - 80 tons	50 - 80 tons
Engine Power of Carrier (Recommended)	260 - 360 HP	195 - 270 kW

Please Note Hydraulic Power Rating Should Not Be Exceeded.

The AQ transverse cutting attachments are designed for rock and concrete cutting and can be mounted on excavators ranging from 1 - 180 ton.

Additional information on other AQ models are available at [www.antraquip.net](http://www.antraquip.net)



Please call your Local Representative, or our Hagerstown, USA Headquarter Office at +1 301.665.1165